

Control Switch Lockout Device, CSLockout Safety Device

Includes:

- lockout device
- hinge clips
- longer mounting screws
- quick install guide

Required Tools:

- screwdriver set

Installation:

- remove two top faceplate screws from control switch
- attach hinge clips to lockout device
- position screws on hinge clips, give a couple of turns to set in place
- attach lockout device to front of control switch and tighten screws
- see details - quick install guide

Notes:

- hinges support multiple configurations to support various control switches
- designed to be installed on a control switch that is in service
- *if existing screws are too short, replace with longer screws, included
- typical installation time – less than 10 minutes
- made in the U.S.A.
- 30 day return policy for refund if not 100% satisfied
- *Video tutorial installation guide: www.legacypowerproducts.com/lockout*

Quick Install Guide:

Reorder: Part # 469A441
 order online: <http://www.legacypowerproducts.com>
 by phone: 203-283-7608




7 48252 17649 3




Step 1

remove top two faceplate screws from control switch

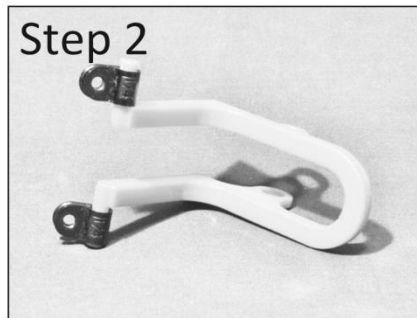


Step 2

attach hinge clips to lockout device

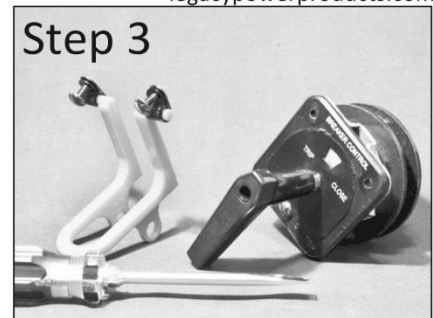


Step 3

hand tighten screws on the hinge clip

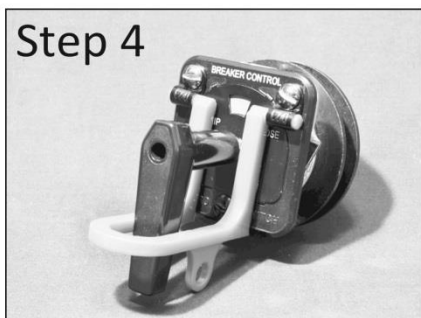

Step 4

attach lockout device to front of control switch, tighten screws

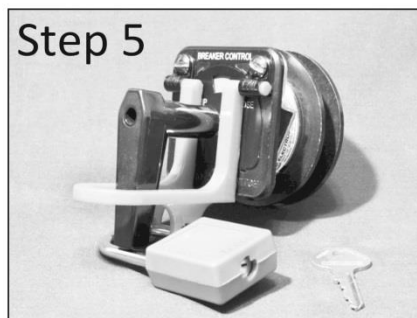

Step 5

installation complete - use safety lock as shown - without lock, the lockout device acts as a guard to prevent accidental operation

legacypowerproducts.com

for some control switches, mount lockout device with hinges below the faceplate screws



for other models, mount lockout device with hinges above the faceplate screws

